


THE BOAT CENTER OF GRAVITY
NEEDS TO BE SET IN THE CENTER
OF THE BUNKS

CAPACITY	DIM: 1	DIM: 2	DIM: 3	DIM: 4	DIM: 5
LBS.	FEET	FEET	INCHES	INCHES	INCHES
4,500#	10'	12'	113"	80"	41"
6,000#					

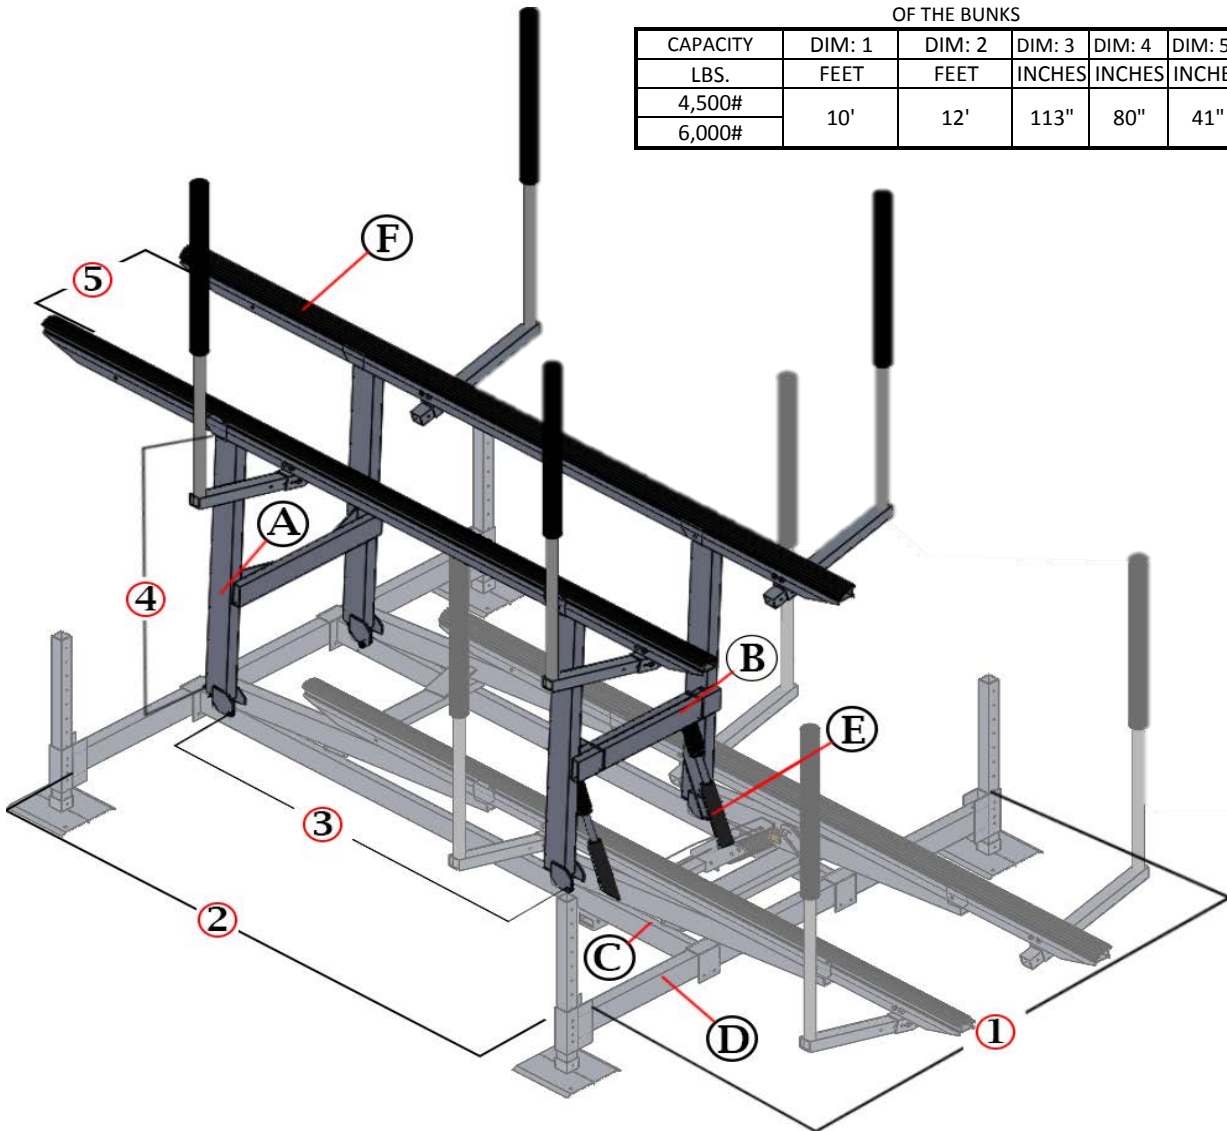

	A	B	C	D	E	F	
LIFT CAPACITY	FRONT H-FRAME	REAR H-FRAME	SIDE BEAMS	CROSS BEAMS	CYLINDERS	BUNKS	STROKE
LBS.	INCHES	INCHES	INCHES	INCHES	DIA.	FEET.	INCHES
4,500#	3 X 6 X .250 WALL REC. TUBE 79.5" LOA	3 X 6 X .250 WALL REC. TUBE 77" LOA WITH RAM MOUNTS	2 X 6 X .250 X 144" LOA	3 X 6 X .250 X 120" LOA	2.5"	2-12' LOA	16"
6,000#			2 X 8 X .250 X 144" LOA		3"		